

# Lafferty Equipment Manufacturing, Inc. Installation & Operation Instructions

Model # 950101-B · 305 Compact Fogger

## REQUIREMENTS

Ready-to-Use Chemical Solution

Compressed Air up to 11.9 Nm<sup>3</sup>/hr @ 5.5 Bar

Minimum Air Supply Line 3/8"

## OPTIONS

Stainless Steel Hose Racks

Large Stainless Steel Hose Rack # 224150

Small Stainless Steel Hose Rack # 224145

Proportioning / Filling Options

1-Way Ball Valve Mixing Station (4 GPM) # 985100

1-Way Push Lever Mixing Station (4 GPM) # 981100

Additional Bottles

Bottle, 32oz (Includes Solid Lid) # 709082

## WEIGHT & DIMENSIONS

Single Package

Shipping Weight 1 Kg.

Shipping Dimensions 381mm x 203mm x 127mm



**COLOR**  
**LIDS**  
**OPTIONS**  
Blue (Standard), Red,  
Green, Yellow



THE  
**SPRAY NOZZLE**  
PEOPLE

**WARNING! READ ALL  
INSTRUCTIONS BEFORE  
USING EQUIPMENT!**

## OVERVIEW

The 305 Compact Fogger is a chemical atomizer that uses compressed air (7.4 CFM @ 80 PSI) to draw pre-diluted chemical solution from the attached bottle, atomize the chemical, and project it as light, "damp" fog particles at distances up to 25 feet.

**SAFETY & OPERATIONAL PRECAUTIONS**

- Manufacturer assumes no liability for the use or misuse of this unit.
- Wear proper respiratory protection, protective clothing, gloves and eye-wear when working with chemicals.
- Always direct the discharge away from electrical devices.
- Follow the chemical manufacturer's safe handling instructions.
- Carefully follow chemical manufacturer's safe handling instructions and recommended precautions/practices when using flammable chemicals.
- **SPECIAL CAUTION: This fogger atomizes chemical into the air. Ensure that the area to be fogged has been evacuated of all people without proper respiratory protection!**

**TO OPERATE**

**SPECIAL CAUTION: This fogger atomizes chemical into the air. Ensure that the chemical is safe to be around or the area to be fogged has been evacuated of all people and/or animals before starting fogging. Upon completion of fogging, ensure that sufficient time has elapsed for all the fog to have dissipated before returning to the area.**

**Wear proper respiratory protection, protective clothing, gloves and eye-wear when working with chemicals**

1. Unscrew the bottle, fill with ready-to-use chemical, and re-attach.
  - Don't over-tighten the bottle.
2. Connect the inlet to a compressed airline.
3. Direct the discharge in a safe direction. Press thumb gun lever (or completely open ball valve) to begin application.
4. When application is complete, release the thumb gun lever (or close ball valve).
5. The fogger may produce more fog volume than needed.
6. If fog is too dense (wet), metering tips are included to restrict the chemical volume to produce a lighter (drier) fog.
7. Make final metering tip adjustments based on application results. Try the next larger sized metering tip until the results are acceptable.

**COMPACT 305 1-WAY FOGGER**

PRODUCE MEDIUM FOG PARTICLES AND PROJECT A LIGHTER, "DAMP" MIST UP TO 25 FEET.

**COMPRESSED AIR FLOW (Nm<sup>3</sup>/hr)**

PLUMES	4.1 Bar	5.5 Bar
1-Way	9.0	11.9


**CHEMICAL SOLUTION DRAW RATE (FL-OZ/MIN)**

DISTANCE	4.1 Bar	5.5 Bar
Hand Held	16.4	18.6

**METERING TIP SELECTION**

METERING TIP COLOR	Litres PER MIN
Brown	0.017
Clear	0.026
Bright Purple	0.044
White	0.064
Pink	0.087
Corn Yellow	0.112
Dark Green	0.144
Orange	0.171
Gray	0.178
Light Green	0.207

The litres/min shown are approximate values. Due to chemical viscosity, actual litres /min may vary.

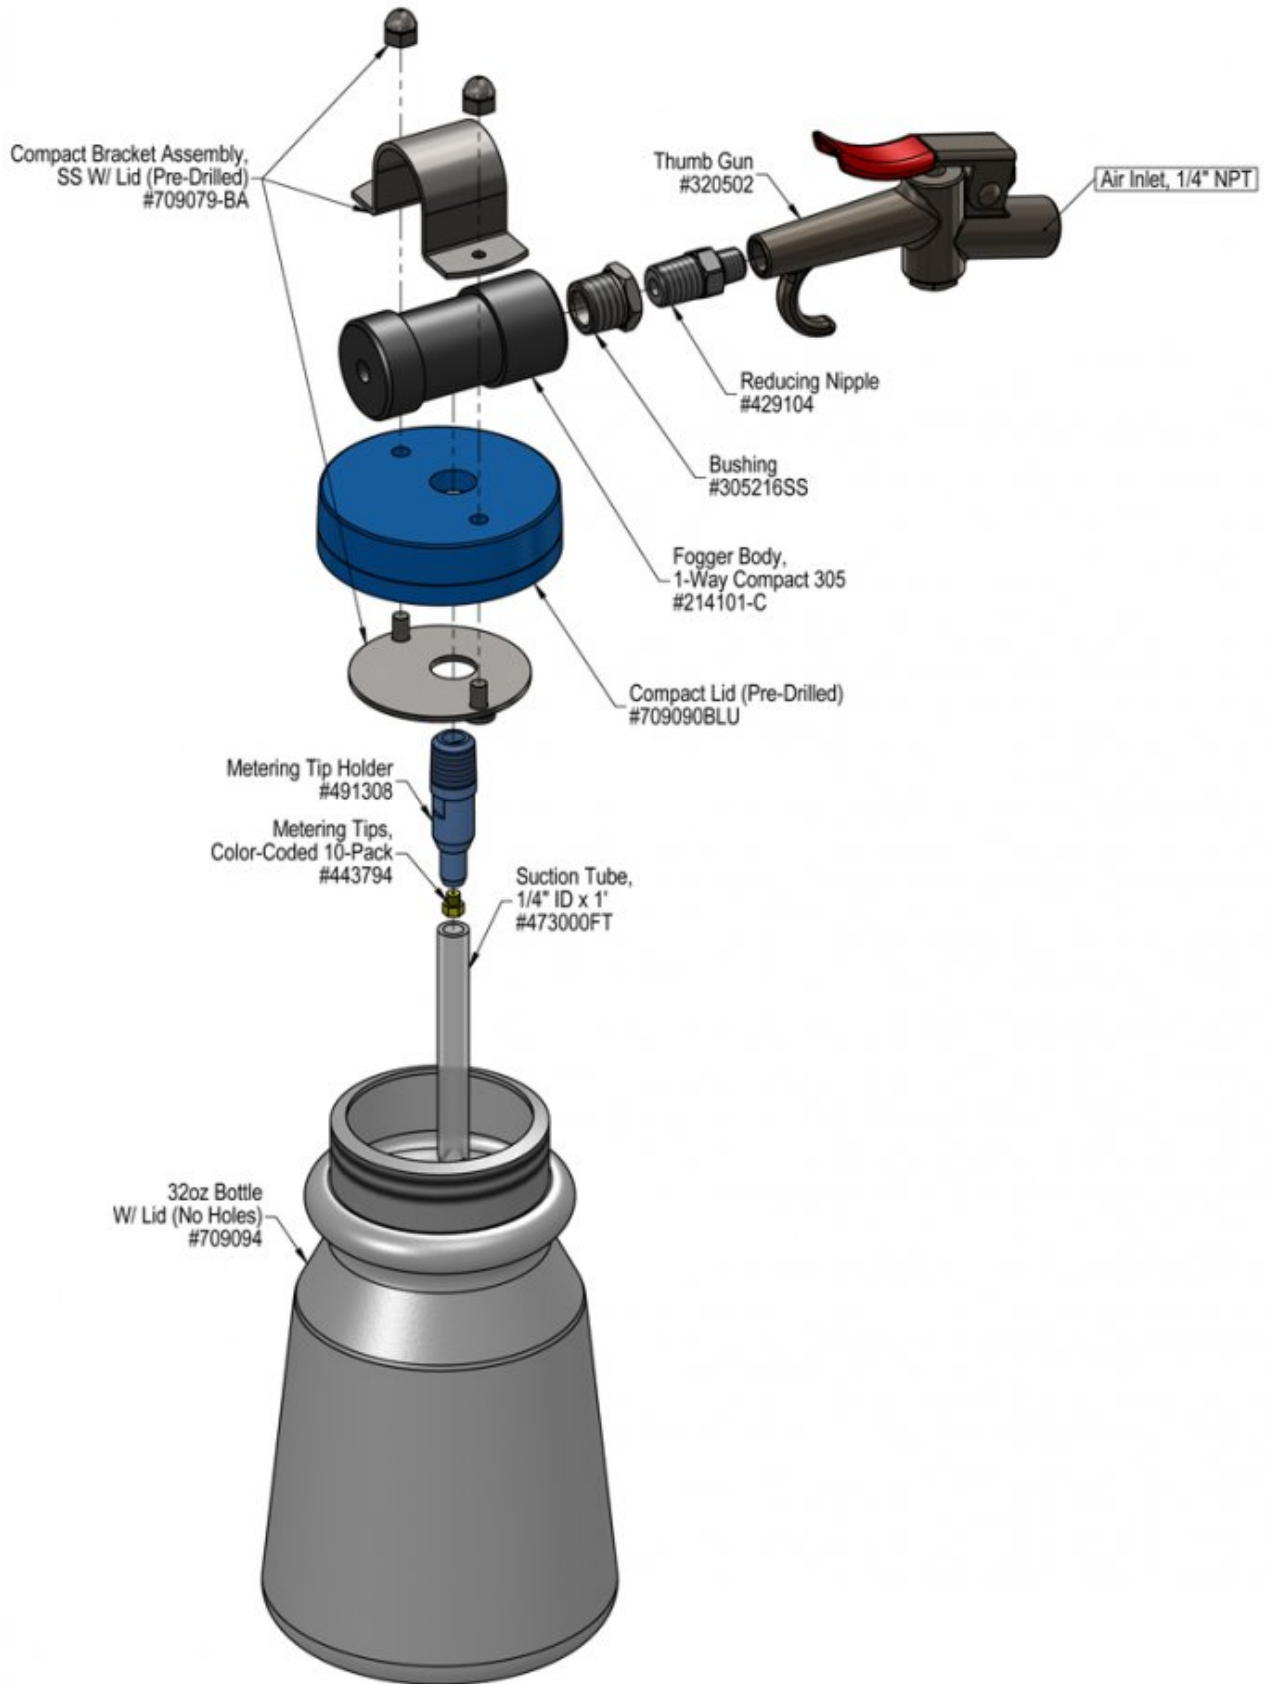

## Troubleshooting Guide

Problem	Possible Cause / Solution	
	Startup	Maintenance
A) Fogger will not draw chemical or is sputtering	1, 2, 3, 4	6, 7, 8
B) Fog is too wet	1, 4	5

Possible Cause / Solution	
Startup	Maintenance
<ul style="list-style-type: none"> <li><b>1. Air line too small, not enough air pressure or volume</b> <ul style="list-style-type: none"> <li>◦ See REQUIREMENTS, page 1.</li> </ul> </li> <li><b>2. Air pressure too high.</b> <ul style="list-style-type: none"> <li>◦ Slightly close the air supply valve to lower the pressure by lowering the volume until the fogger smooths out.</li> </ul> </li> <li><b>3. Chemical tube kinked or not immersed in chemical or chemical depleted.</b> <ul style="list-style-type: none"> <li>◦ Straighten tube / replenish chemical</li> </ul> </li> <li><b>4. Drawing too much solution</b> <ul style="list-style-type: none"> <li>◦ Install optional metering tip</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li><b>5. Pin hole or cut in suction tube</b> <ul style="list-style-type: none"> <li>◦ Replace suction tube.</li> </ul> </li> <li><b>6. Chemical tube clogged up</b> <ul style="list-style-type: none"> <li>◦ Clean or replace</li> </ul> </li> <li><b>7. Metering tip or metering tip holder clogged</b> <ul style="list-style-type: none"> <li>◦ Clean or replace metering tip and/or metering tip holder.</li> </ul> </li> <li><b>8. Debris clogging the fogger inlet jets</b> <ul style="list-style-type: none"> <li>◦ Disconnect air supply, remove fogger bodies and visually inspect; remove debris from fogger inlet.</li> </ul> </li> </ul>

**PREVENTIVE MAINTENANCE:** When the unit will be out of service for extended periods, place chemical tube(s) in water and flush the chemical out of the unit to help prevent chemical from drying out and causing build-up. Periodically check and clean chemical strainer and replace if missing.